

Vent A.Hood wall mount range hood specifications

CWH Equipped with LED lighting. WL-1 warming lights are available on selected models.

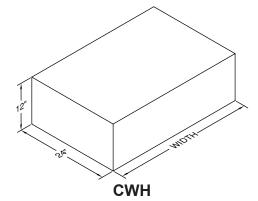

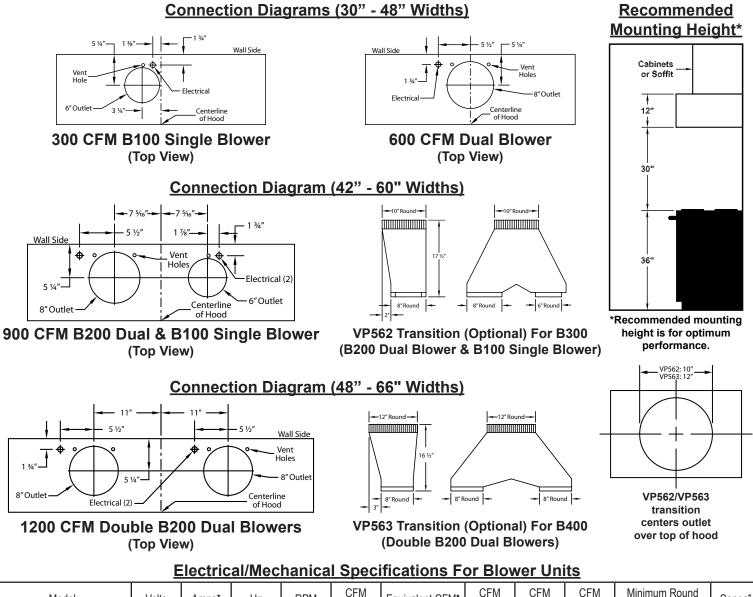

| Volts | Amps* | Hz | RPM | CFM SP@0.0" | Equivalent CFM• | CFM SP@0.1" | CFM SP@0.2" | CFM SP@0.3" | Minimum Round Duct Size | Sones [#] |
|-------|-------------------|---|--|---|--|---|---|---|---|--|
| 115 | 2.5 | 60 | 1550 | 300 | 450 | 273 | 245 | 225 | 6" (28 in. ²) | 5.4 |
| 115 | 4.0 | 60 | 1550 | 600 | 900 | 531 | 480 | 430 | 8" (50 in. ²) | 6.5 |
| 115 | 6.0 | 60 | 1550 | 900 | 1350 | 804 | 725 | 655 | VP562: 10" (79 in.2) | 6.3 |
| 115 | 7.5 | 60 | 1550 | 1200 | 1800 | 1062 | 960 | 860 | VP563: 12" (113 in.2) | 6.6 |
| | 115 115 115 | 115 2.5 115 4.0 115 6.0 | 115 2.5 60 115 4.0 60 115 6.0 60 | 115 2.5 60 1550 115 4.0 60 1550 115 6.0 60 1550 | Voits Amps" Hz RPM SP@0.0" 115 2.5 60 1550 300 115 4.0 60 1550 600 115 6.0 60 1550 900 | Voits Amps" Hz RPM SP@0.0" Equivalent CFM" 115 2.5 60 1550 300 450 115 4.0 60 1550 600 900 115 6.0 60 1550 900 1350 | Voits Amps" HZ RPM SP@0.0" Equivalent CFM" SP@0.1" 115 2.5 60 1550 300 450 273 115 4.0 60 1550 600 900 531 115 6.0 60 1550 900 1350 804 | Voits Amps" HZ RPM SP@0.0" Equivalent CFM" SP@0.1" SP@0.2" 115 2.5 60 1550 300 450 273 245 115 4.0 60 1550 600 900 531 480 115 6.0 60 1550 900 1350 804 725 | Volts Amps* Hz RPM SP@0.0" Equivalent CFM* SP@0.1" SP@0.2" SP@0.3" 115 2.5 60 1550 300 450 273 245 225 115 4.0 60 1550 600 900 531 480 430 115 6.0 60 1550 900 1350 804 725 655 | Volts Amps* Hz RPM SP@0.0" Equivalent CFM* SP@0.1" SP@0.2" SP@0.3" Duct Size 115 2.5 60 1550 300 450 273 245 225 6" (28 in ²) 115 4.0 60 1550 600 900 531 480 430 8" (50 in ²) 115 6.0 60 1550 900 1350 804 725 655 VP562: 10" (79 in ²) |

* Add 2.5 amp for each warming light. Hood is available with LED lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
Because the Magic Lung[®] blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung[®] blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung[®] with other blower units made by other manufacturers, use the "Equivalent CFM".
Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0516A

c(UL)us