
## DESIGNER SERIES WALL MOUNT RANGE HOOD

JPH/C2 Series Equipped with LED lighting. Not available with heat lamps. Optional duct covers available in standard and custom sizes.

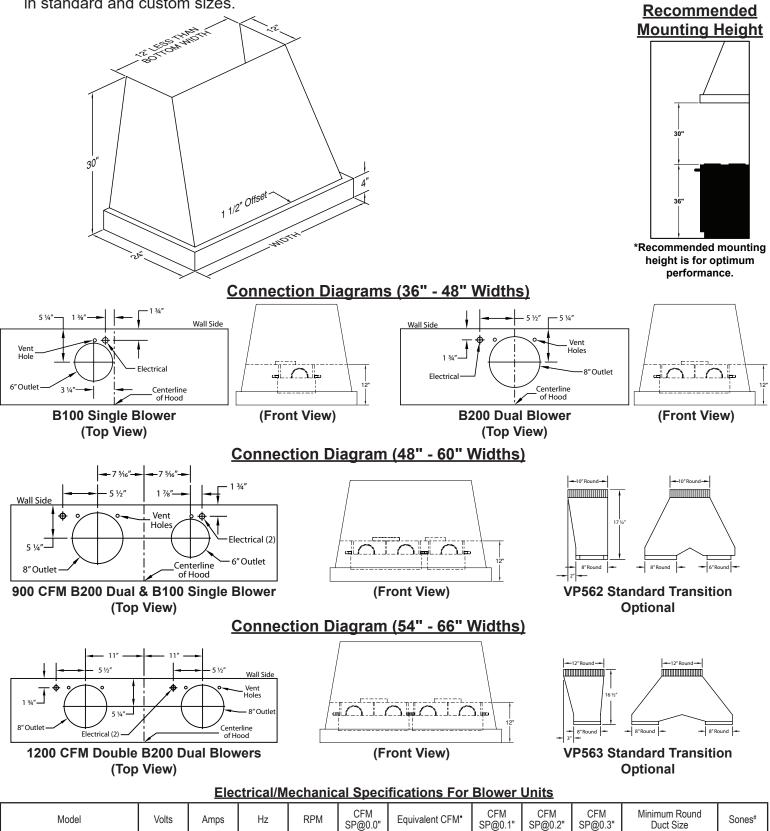

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM•	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	2.5	60	1550	300	450	273	245	225	6" (28 in. <sup>2</sup> )	5.4
B200 Dual	115	4.0	60	1550	600	900	531	480	430	8" (50 in. <sup>2</sup> )	6.5
B200 Dual & B100 Single	115	6.0	60	1550	900	1350	804	725	655	VP562: 10" (79 in. <sup>2</sup> )	6.3
Two B200 Duals	115	7.5	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. <sup>2</sup> )	6.6
List dis social biological design (All All All All All All All All All Al											

Vent A Hood

Hood is available with LED lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 64" - 66"). Because the Magic Lung<sup>®</sup> blower uses centrifugal filtration rather than conventional baffie or mesh filters, the Magic Lung<sup>®</sup> blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung<sup>®</sup> with other blower units made by other manufacturers, use the "Equivalent CFM". # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

c(UL)us