MODEL #SEPTH18-466

Euro Pro High-Capacity Wall Mount Hood with Emerald-Cut Edges, Magic Lung® Blower

This European-style hood creates a refined silhouette, pairing linear styling with our patented emerald-cut edges. Higher-capacity Magic Lung® blower configurations provide enhanced performance for demanding cooking environments, with patented centrifugal filtration for powerful yet exceptionally quiet ventilation. SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety, while dishwasher-safe components simplify cleanup. Matching duct covers sold separately.

To view available finishes & accessories please visit ventahood.com/products/SEPTH18-466

SPECIFICATIONS

WIDTH	66"
DEPTH	24"
HEIGHT	18"
CFM [1]	1200
EQUIVALENT CFM [2]	1800
SOUND RATING (HIGH SPEED) [3]	6.6 Sones / 57.2 dB
LIGHTING [4]	4 LEDs 2700K Warm White

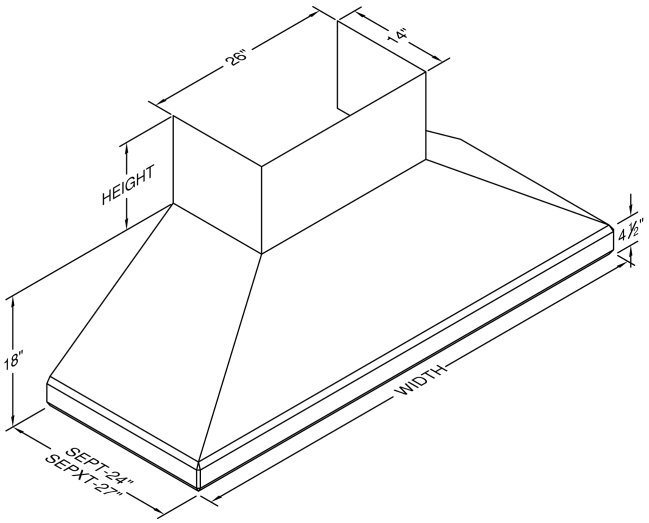

DUCT COVERS



Wall Mount Duct Cover
Models: WDCRND-26/12, WDCRND-26/24, WDCRND-26/36

RECOMMENDED MOUNTING HEIGHT

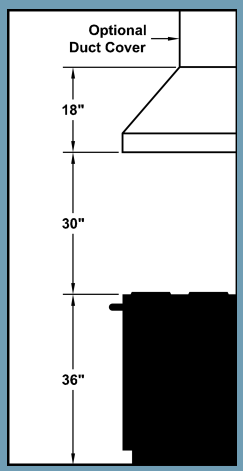

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

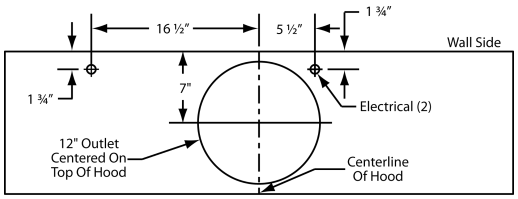

1200 CFM Double B200 Dual Blowers (Top View)

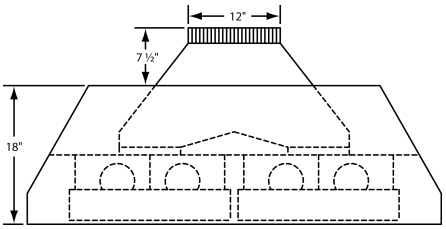

VP563 Standard Transition Installed (Front View)



The transition shown (VP563) is installed in the hood at the factory as a standard item. It will be located in the exact center of the duct cover (left to rear & front to rear).

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP[5]	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
2 × B200 Dual	115	7.5	60	1550	1200	1062	960	860	12" (113sq.in.)

[1] CFM (cubic feet per minute) measures airflow. [2] Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. [3] Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. [4] This model is not available with heat lamps. [5] Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE 062626