


Professional Wall Mount Hood with Emerald-Cut Edges - Tall Profile, Magic Lung® Blower

The 30" silhouette adds elevated vertical presence, complemented by patented emerald-cut edges. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.


To view available finishes & accessories please visit ventahood.com/products/SLH30-130

SPECIFICATIONS


WIDTH	30"
DEPTH	24"
HEIGHT	30"
CFM ¹	300
EQUIVALENT CFM ²	450
SOUND RATING (HIGH SPEED) ³	5.4 Sones / 55.4 dB
LIGHTING ⁴	2 LEDs 2700K Warm White

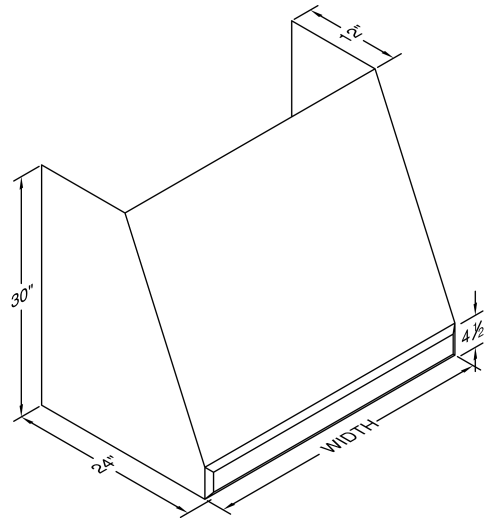

DUCT COVERS





RECOMMENDED MOUNTING HEIGHT

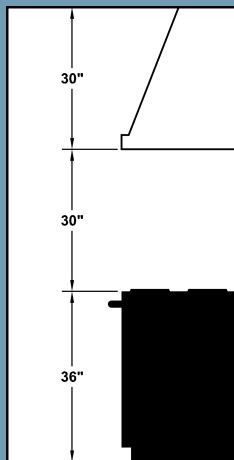

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

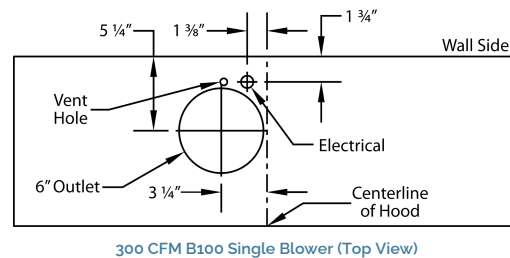

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS ⁵	HZ	RPM	CFM @ 0.0" SP ⁶	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
B100 Single	115	2.5	60	1550	300	273	245	225	6" (28sq.in.)

¹ CFM (cubic feet per minute) measures airflow. ² Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. ³ Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ⁴ WBAR warming light bar is available on selected models. ⁵ Add 2.5 amps for each warming light. This model is equipped with LED lighting: 2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66". ⁶ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.