MODEL #SLH6-K42

Professional Under Cabinet Hood with Emerald-Cut Edges, Low-Profile Blower (V-Line)

Patented emerald-cut edges create a distinctive sculpted silhouette. Powerful Low-Profile blower technology uses centrifugal filtration to quietly capture smoke, grease and cooking vapors. Dishwasher-safe components simplify cleanup.

To view available finishes & accessories please visit ventahood.com/products/SLH6-K42

SPECIFICATIONS

WIDTH	**42"**
DEPTH	**19 1/2"**
HEIGHT	**6"**
CFM [1]	**250**
EQUIVALENT CFM [2]	**375**
SOUND RATING (HIGH SPEED) [3]	**7.4 Sones / 58.2 dB**
LIGHTING [4]	**3 LED GU10s 3000K Warm White**

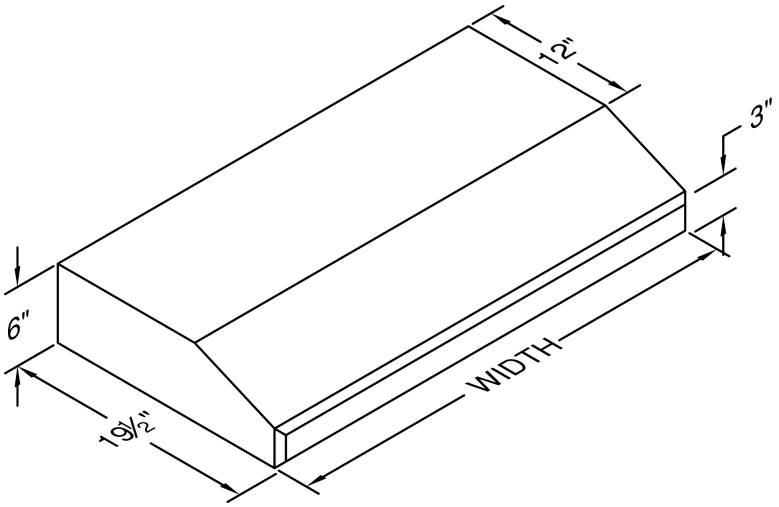

RECOMMENDED MOUNTING HEIGHT

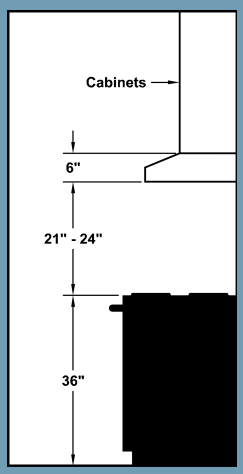

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

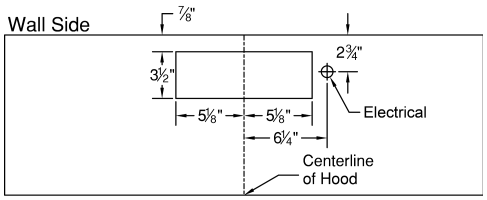

(Top View)

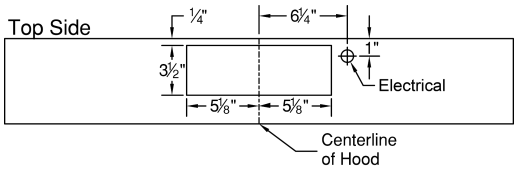

(Wall Cutout, Viewed from Front)



The VP521 transition is available for top vent applications at an additional charge.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP[5]	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
K250 (Top Vent) ARS	**115**	**3.5**	**60**	**1550**	**250**	**223**	**220**	**190**	**7" (38sq.in.)**

[1] CFM (cubic feet per minute) measures airflow. [2] Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. [3] Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. [4] This model is not available with heat lamps. [5] Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE 062626