MODEL #XLH12-230C SS

Contemporary Convex Wall Mount Hood with Magic Lung® Blower

A convex silhouette and contemporary lines combine to create a dramatic modern statement. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.

To view available finishes & accessories please visit ventahood.com/products/XLH12-230C-SS

SPECIFICATIONS

WIDTH	30"
DEPTH	21"
HEIGHT	12"
CFM [1]	600
EQUIVALENT CFM [2]	900
SOUND RATING (HIGH SPEED) [3]	6.5 Sones / 57 dB
LIGHTING [4]	2 LEDs 2700K Warm White

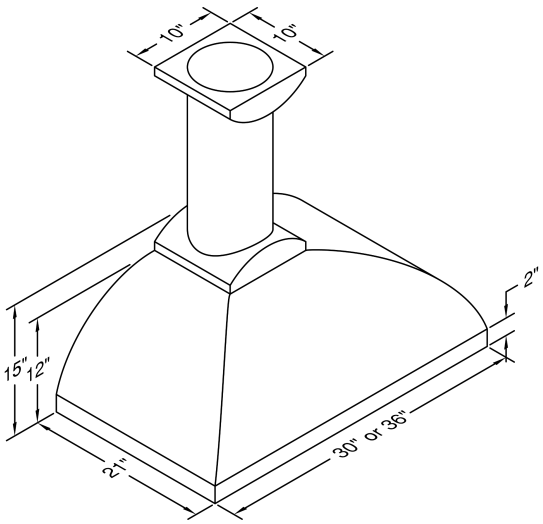

OPTIONAL DUCT COVERS

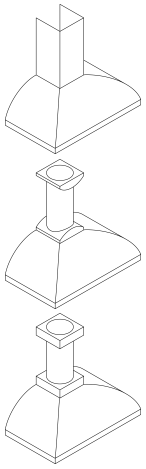

Hood with optional 10" x 10" duct cover.

Hood with optional duct collars and finished round duct.[6]

Hood with optional square duct collars and finished round duct.[6]

RECOMMENDED MOUNTING HEIGHT

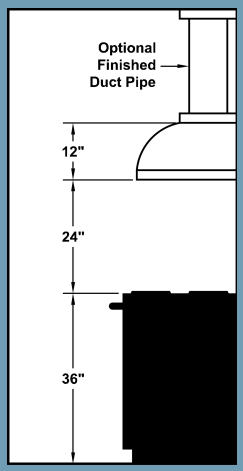

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

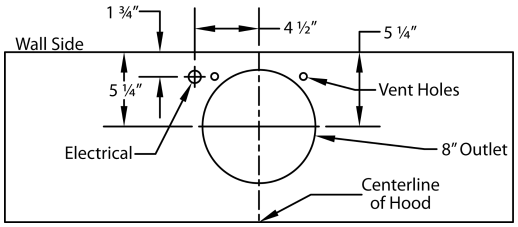

600 CFM B200 Dual Blower (Top View)

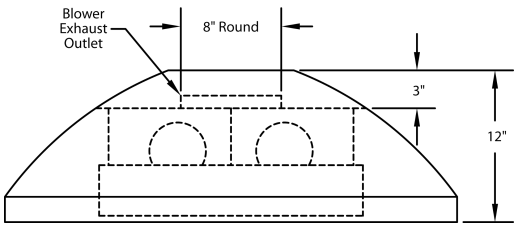

(Front View)



Finished Round Duct (two required)[6]

Models: WRDC-8/16, WRDC-8/28, WRDC-8/40



Round Duct Collar



Square Duct Collar



10" x 10" Square Duct Cover



Wall Mount Duct Cover

Models: WDCRND-10/12, WDCRND-10/24, WDCRND-10/36

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP[5]	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
B200 Dual	**115**	**4.0**	**60**	**1550**	**600**	**531**	**480**	**430**	**8" (50sq.in.)**

[1] CFM (cubic feet per minute) measures airflow. [2] Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. [3] Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. [4] This model is not available with heat lamps. [5] Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions. [6] Top end of finished round duct is crimped to allow for duct connection in the ceiling (crimp is not included in the overall height of the finished round duct).

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE 102026