
Vent Alload EUROSTYLE WALL MOUNT RANGE HOOD SPECIFICATIONS

EPTH18/EPXTH18/NEPTH18/NEPXTH18/SEPTH18/SEPXTH18 Equipped with LED lighting. Not available with heat lamps. Shown with optional duct cover sold separately). Optional duct covers available in standard and custom sizes.

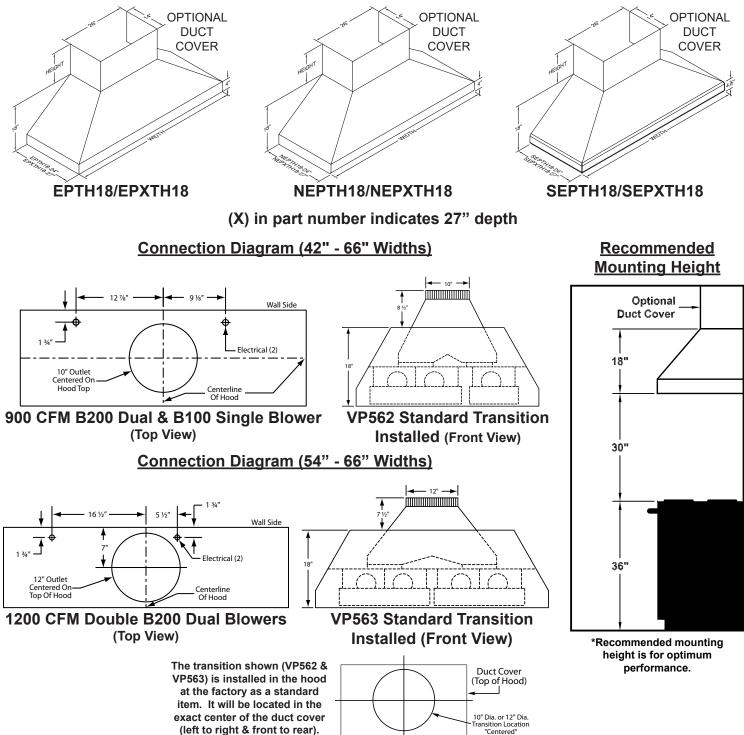

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM•	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual & B100 Single	115	6.0	60	1550	900	1350	804	725	655	10" (79 in. ²)	6.3
Two B200 Duals	115	7.5	60	1550	1200	1800	1062	960	860	12" (113 in. ²)	6.6

Hood is available LED lights (3 lights: 42" - 53", 4 lights: 54" - 66"). • Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM". # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station. c(UL)us