MODEL #CWEH9-448

Contemporary Wall Mount Hood with Magic Lung® Blower

Clean geometric lines and contemporary styling create a bold modern focal point. Patented Magic Lung® technology delivers powerful yet exceptionally quiet ventilation through centrifugal filtration, while SensaSource® automatically adjusts blower speed for enhanced grease control and fire safety. Dishwasher-safe components simplify cleanup. Matching duct covers sold separately.

To view available finishes & accessories please visit ventahood.com/products/CWEH9-448

SPECIFICATIONS

WIDTH	**48"**
DEPTH	**21"**
HEIGHT	**9"**
CFM [1]	**1200**
EQUIVALENT CFM [2]	**1800**
SOUND RATING (HIGH SPEED) [3]	**6.6 Sones / 57.2 dB**
LIGHTING [4]	**3 LEDs 2700K Warm White**

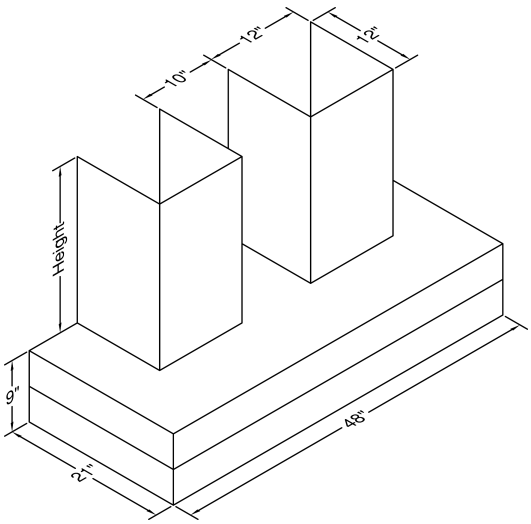

DUCT COVERS



Wall Mount Duct Cover
Models: WDCRND-12/12, WDCRND-12/24, WDCRND-12/36

RECOMMENDED MOUNTING HEIGHT

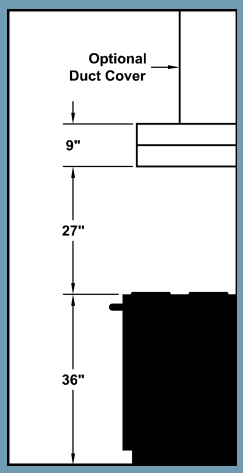

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

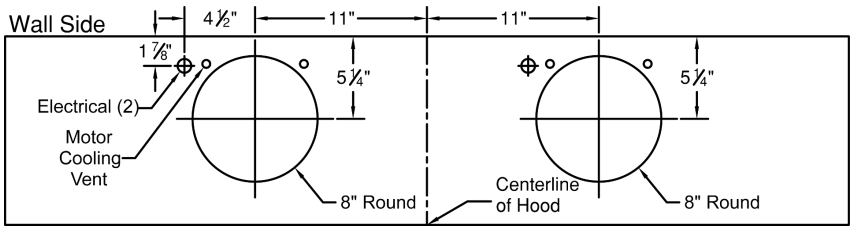

1200 CFM Double B200 Dual Blowers (Top View)

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP[5]	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
2 × B200 Dual	**115**	**7.5**	**60**	**1550**	**1200**	**1062**	**960**	**860**	**12" (113sq.in.)**

[1] CFM (cubic feet per minute) measures airflow. [2] Because Magic Lung® blowers use centrifugal filtration instead of traditional baffle or mesh filters, they move air more efficiently. When comparing to other brands, use Equivalent CFM to understand real-world performance. [3] Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. [4] WL-1 warming lights are available on selected models. [5] Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE 062626